

# DK-5000

series

*Count Values Saved  
 with Timestamp  
 Data Viewing & Saving via PC*



*Sensor Input &  
 Wireless  
 Communication  
 as Options*



*Support up to 30 Inputs*

*Remote Monitoring  
 of On-Site Data*



**A** Type

*5-30 combined tally counters with timestamp*

**B** Type

*Timestamp Recorder with 5-30 input keys*

**C** Type

*5-30 combined tally counters with automatic recording function*

**D** Type

*Status Recorder with 5-30 input keys*

**E** Type

*5-30 combined tally counters with timestamp (Keypad Tone + Preset Alarm)*

**Option 1** / *Sensor Input*

**Option 2** / *Wireless Communication*

Type **A**


# Tally counter with timestamp DK-5000A Series



This is a Bank Tally Counter equipped with memory function. Count values are saved with timestamp. This counter can substitute for mechanical tally counter to make it easier to tally and save count data.

**Product Applications**

- Warehouses
- Various events
- Inspection Process

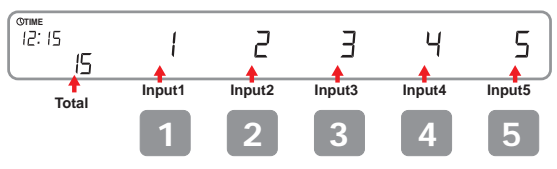

**- Example -**  
Pushed "Input Key + Memory Key"  
[1 - 5] [#]  
at 1-minute intervals

Auto-Acquire Record **Record Data**

Timestamp	Total	Input1	Input2	Input3	Input4	Input5
1   2017-03-01 12:01:00	1	1	0	0	0	0
2   2017-03-01 12:02:00	2	1	1	0	0	0
3   2017-03-01 12:03:00	3	1	1	1	0	0
⋮						
15   2017-03-01 12:15:00	15	1	2	3	4	5

## Count Values with Date & Time




Type **B**

# Timestamp Recorder with input keys DK-5000B Series

Date & Time is recorded whenever the keys are pressed. The number of times the keys are pressed is displayed. Start time and End time are recorded. You can analyze the saved data on the computer.

**Product Applications**

- Inspection Process at production sites
- At various events, shops, facilities and etc.

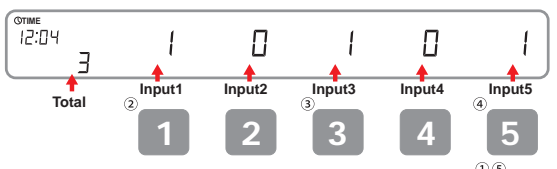


**- Example -**  
Input Keys and Memory Key were pressed in the following sequence at 1-minute intervals:  
# → 1 → 3 → 5 → #

Auto-Acquire 2015-04-01 12:00:00 **Record Data**

Timestamp	Total	Input1	Input2	Input3	Input4	Input5
1   2017-03-01 12:00:00	0	0	0	0	0	0
2   2017-03-01 12:01:00	1	1	0	0	0	0
3   2017-03-01 12:02:00	2	0	0	1	0	0
4   2017-03-01 12:03:00	3	1	0	1	0	1
5   2017-03-01 12:04:00	0	1	0	1	0	1

## Digitalization of Manually Input Data

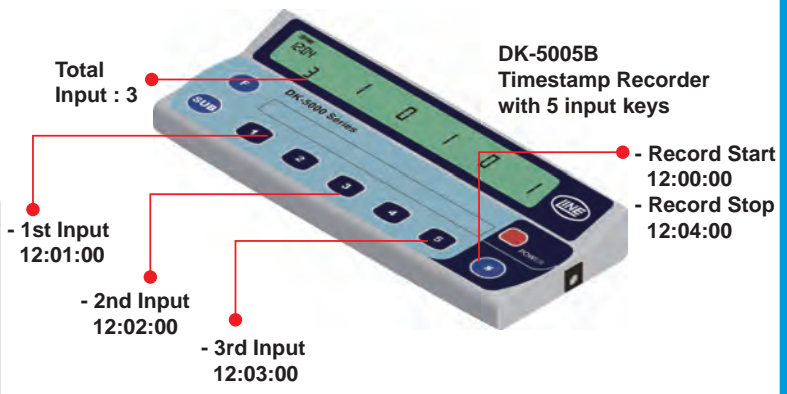

Type **C**


Tally counter with automatic recording function

**DK-5000C Series**

The individual count values and the total count are recorded automatically at preset intervals with a corresponding timestamp. You can select whether or not to reset the count values after a data log is saved.

**Product Applications**

- Traffic Survey
- At various events, shops, facilities and etc.

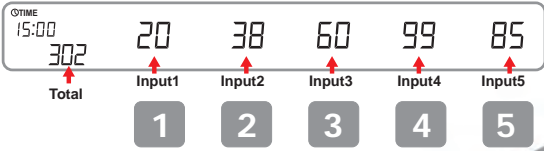

**Count values are recorded automatically**

**- Example -**

Automatic recording interval : 1H  
Operation after recording : Non reset



Present 2015-04-01 23:00:00

**Record Data (Part of Data)**

	Timestamp	Total	Input1	Input2	Input3	Input4	Input5
1	2017-03-01 11:00:00	0	0	0	0	0	0
2	2017-03-01 12:00:00	123	8	10	25	30	50
3	2017-03-01 13:00:00	245	12	18	52	85	78
4	2017-03-01 14:00:00	272	12	35	55	92	78
5	2017-03-01 15:00:00	302	20	38	60	99	85

**DK-5005C**  
5 combined tally counter with automatic recording function

Type **D**


Status Recorder with input keys

**DK-5000D Series**

The input status is toggled between HI and LO and recorded with timestamp whenever pressing input keys. HI and LO time of each input key can be summed up.

**Product Applications**

- Time Study
- Production Monitoring



**- Example -**

Sensor Input 1 & 2 are used for sensor inputs. Alternating status of machinery and equipment is recorded. Total time of HI/LO is tallied as well.



Sensor input (Lighting/Flash) from M13-215 wired up to M16-600

Auto-Acquire 2015-04-01 12:00:00

**Record Data**

	Timestamp	Input1	Input2	Input3	Input4	Input5
1	2017-03-01 12:00:00	-	-	-	-	-
2	2017-03-01 12:25:00	-	-	-	-	-
3	2017-03-01 12:50:00	H	H	-	-	-
4	2017-03-01 14:20:00	-	H	-	-	-
5	2017-03-01 15:00:00	-	H	-	-	-
	HI Time	01:55:00	02:10:00	00:00:00	00:00:00	00:00:00
	LO Time	01:05:00	00:50:00	03:00:00	03:00:00	03:00:00

**Status Recorder (HI & LO)**

**M16-600**  
Sensor Input Device

**DK-5005D**  
Status Recorder with 5 input keys




Type  
**E**

# Tally counter with timestamp and buzzer function DK-5000E Series

**Product Applications**

- Laboratories
- White Blood Cell Counting

When the total value reaches a preset value, the device makes an electronic alarm sound. You can input while looking into the microscope since an electronic sound is generated when inputting.

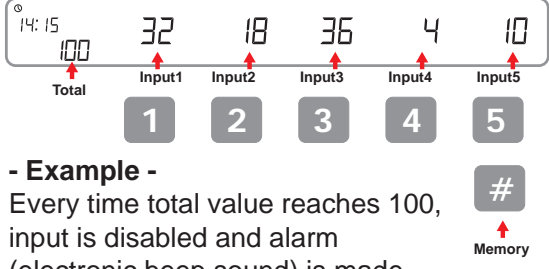


**- Example -**  
Every time total value reaches 100, input is disabled and alarm (electronic beep sound) is made.



Auto-Acquire		Record	<b>Record Data(Preset:100)</b>				
Timestamp	Total	Input1	Input2	Input3	Input4	Input5	
1   2017-03-01 12:00:00	100	33	32	7	20	8	
2   2015-04-01 12:36:00	100	40	18	5	17	20	
3   2015-04-01 13:03:00	100	38	22	21	9	10	
4   2015-04-01 13:39:00	100	29	26	7	18	20	
5   2015-04-01 14:15:00	100	32	18	36	4	10	

## Count up with key sound Beep at goal you set

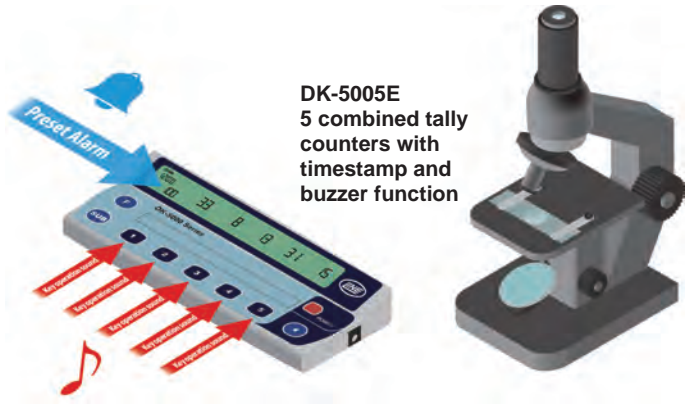

**DK-5005E**  
5 combined tally counters with timestamp and buzzer function

### Specifications

DK - 50□□□

**Input**  
**05** : 5 inputs  
**10** : 10 inputs  
**30** : 30 inputs

**Features**  
**A** : 5 to 30 combined tally counters + timestamp function  
**B** : Timestamp Recorder with 5 to 30 input keys  
**C** : 5 to 30 combined tally counters + automatic recording function

**D** : Status Recorder with 5 to 30 input keys  
**E** : A Type + Input Key Operation Sound + Preset Alarm (Total Count)

Models	DK-50□□A / DK-50□□E*	DK-50□□B	DK-50□□C	DK-50□□D
<b>Features</b>	- Bank Tally Counter - Save each & total count values with timestamp	- Event Time Recorder - Every time input keys are pushed, each & total count values are saved with timestamp.	- Bank Tally Counter - Automatic recording at preset intervals - Save each & total count values with timestamp saved with timestamp.	- Status Recording Device - Every time input keys are pushed, status (HI / LO) is saved with timestamp

Models	DK-50□□A / DK-50□□E*	DK-50□□B	DK-50□□C	DK-50□□D	Accessories
<b>Recording Operation</b>	When # key is pushed	Whenever input keys are pushed after recording is started.	At preset intervals after recording is started.	Whenever input keys are pushed after recording is started.	Instruction Manual (Battery & USB Cable Not included)
<b>Recording Setting</b>	Alarm Setting (E Type only)	Nothing	Recording interval Setting	Nothing	
<b>Record viewing</b>	Unit or Windows PC	Windows PC	Windows PC	Windows PC	<b>Software Specifications</b> CPU : Pentium2 266 MHz OS : Windows7,8,8.1,10 Disk Application: 50MB Space   Java Runtime Environment: 160MB Memory : 1GB Downloadable from <a href="http://www.lineiseiki.com">http://www.lineiseiki.com</a>
<b>Memory capacity</b>	250 records max.	Max. key input times DK-5005B : 48,000 DK-5010B : 27,750 DK-5030B : 10,000	Max. number of logs DK-5005C : 48,000 DK-5010C : 27,750 DK-5030C : 10,000	Max. key input times DK-5005D : 48,000 DK-5010D : 27,750 DK-5030D : 10,000	
<b>Input Type</b>	Rubber Key				<b>Option</b> USB-02 (USB Cable) * A general-purpose micro B-to-A USB cable can be used. AC/DC Adapter (DK-5) * Please use Line Seiki AC/DC Power Adapter
<b>Display Type</b>	7-Segment LCD	Counter / Status (x 5) : 7 mm (H), Total Count : 5 mm (H) Record Number / Time Display : 3.5 mm (H)			
<b>Input Display</b>	0 - 99999 (Internal : 0 to 99999)			HI or LO	
<b>Total Count Display</b>	0 - 999999			-	
<b>Clock Function</b>	Year / Month / Day / Hour (24 hour) / Minute / Second				
<b>Memory</b>	Built-in flash memory				
<b>Data Communication</b>	USB micro-B (USB 2.0)				
<b>Power Source</b>	AAA Battery x 4 pcs. / USB Cable / AC/DC Adapter				
<b>Battery Life</b>	Approx. 200 hour min. ( Under normal operating temperature using Alkaline type battery)				
<b>Ambient Temp. Humid. : Operating</b>	0°C - 50°C (-10°C - +60°C) / 35 - 85%RH (Should not be frozen, Non-condensing)				
<b>Weight (excl. Battery)</b>	DK-5005 : Approx. 130g / DK-5010 : Approx. 185g / DK-5030 : Approx. 340g				
<b>Dimensions</b>	DK-5005 : 70 x 170 x 25mm / DK-5010 : 96 x 170 x 25mm / DK-5030 : 186 x 170 x 25mm				

\* DK-50□□E = DK-50□□A + (Key Operation Sound [on/off] and Preset Alarm)

**Option**

# Accessories (All models of the DK-5000 series)

- Exclusive accessories add the following functions to DK-5000 Series:
- (1) External Input — enables DK-5000 Series to gain signals from external equipment/devices
- (2) Wireless Communication — enables you to gain recorded data through software on remote PC

**Sensor Input**

**Sensor Input Device**  
**M16-600** Configuration example

M16-600 can transfer inputs from external sensors to DK-5005A, instead of pushing input keys

**M13-215**  
**Andon Sensor**



**M13-206**  
**Switch Box**



**Proximity sensor etc.**

Wire up sensors to terminals of M16-600 for count input



**M16-600**  
**Sensor input Device**

**x5**

**DK-5005A**  
**5 combined tally counters with timestamp**



**Wireless communication**

**Wireless End Device (802.15.4)**  
**M16-302** Configuration example

**Wireless Coordinator (802.15.4)**  
**M16-303** Configuration example

Count values on DK-5005A can be monitored on remote PC through wireless communication, by attaching M16-302 to DK-5005A and M16-303 to PC.



**M16-302**  
**Wireless End Device (802.15.4)**



**DK-5005A**  
**5 combined tally counters with timestamp**



Count Input



**Windows PC**



**M16-303**  
**Wireless Coordinator (802.15.4)**

**Sensor Input**

**Sensor Input Device + Wireless LAN**  
**M16-601** Configuration example

The change of status is displayed on remote PC by getting the signal from equipment directly.

**M13-215**  
**Andon Sensor**



Andon

**M16-601**  
**Sensor Input Device + Wireless LAN**



Wire up to terminals for sensor input (Lighting / Flash)



**Wireless LAN Router**



**DK-5005D**  
**Status Recorder with 5 input keys**



**Windows PC**

## Specifications

Model	M16-600	M16-601*	M16-301*	M16-602**	M16-302**	M16-303***
Features	Sensor Input Device	Sensor Input Device + Wireless LAN	Wireless LAN Adapter	Sensor Input Device + Wireless (802.15.4)	Wireless End Device (802.15.4)	Wireless Coordinator (802.15.4)
Function	Transmission of External Input	○	○	-	○	-
	Wireless access from PC to DK-5000	-	○	○	○	○
Wireless Network	-	Wireless LAN		Wireless (802.15.4)		

\* Windows PC + Wireless LAN Router \*\* Windows PC + M16-303 \*\*\* Windows PC + M16-302 / M16-602

Model	M16-601 / M16-301	M16-602 / M16-302 / M16-303	Model	M16-600 / M16-601 / M16-602
Wireless Communication	IEEE802.11b/g/n	IEEE802.15.4	Input Mode	Open Collector / Contact Input
Wireless Range	Up to 30 m Line-of-Sight (LOS)		Input	Non-contact Input : Open Collector
Operating Frequency	ISM 2.4 to 2.5 GHz			Sink Current approx. 1.5 mA L : < 1.4 V
Operating Channel	13 Channels (Automatic)	16 Channels (CH.11 to 26)		Contact Input :
Frequency Modulation	DS-SS (IEEE802.11b)	Direct Sequence		Relay, Microswitch, Others
	OFDM (IEEE802.11g/n)	Spread Spectrum (DS-SS)	Input Speed	Sink Current approx. 1.5 mA
				Count Input : 10 Hz (Duty 1:1)
			Sensor Power Supply	Status Input : pulse width of 1 second min. ****
			Sensor Input Terminal	12 VDC (100 mA)
Power Source	AC/DC Power Adapter (except M16-303) / USB 5 V (Consumption Current Approx. 55 mA)			
Power Supply	USB Power Supply : Vbus 5 V (100 mA) except M16-303			
DK-5000 Connection	USB 2.0 (USB Micro-B) except M16-303			
Ambient Temp. : Operating	0 to 50 °C (Should not be frozen)			
Ambient Humid. : Operating	35 to 85 %RH (Non-condensing)			
Ambient Temp. : Storage	-10 to +60 °C (Should not be frozen)			
Dimensions	M16-600 M16-601 M16-602 : 150 x 100 x 32 mm (excluding antenna) / M16-301 M16-302 : 75 x 50 x 32 mm (excluding antenna) / M16-303 : 97 x 48 x 16 mm			
Weight	M16-600 : Approx. 240 g / M16-601 M16-602 : Approx. 250 g / M16-301 M16-302 : Approx. 60 g / M16-303 : Approx. 35 g			
Accessories	Instruction Manual x 1, USB On-the-Go (OTG) Host Cable x 1, Micro B-to-A USB Cable x 1, AC/DC Power Adapter x 1 (except M16-303)			

\*\*\*\* DK-5005D / DK-5010D / DK-5030D only \*\*\*\*\* These wireless devices are compliant with radio law in Japan, the United States, Canada and EU.



# Sensors for M16-6XX

Sensors and switches that can work with M16-6XX  
General-purpose proximity sensors can also  
be connected to M16-6XX

---



## Switch Box M13-206

M13-206 is a push-button switch.  
Four operation modes can be switched  
by DIP switch.





## Andon Sensor M13-215

Attached to a tower light, this  
sensor detects the status  
(Lighting/Flash) of the tower  
light and outputs signals.



## Specifications

Input Type	Contact / Open Collector
Reset	Open Collector Output
Power Supply	DC12 - 24V (-15% / +10%)
Power Consumption	approx. 500mW
Ambient Temp. : Operating	0 - 50°C (non-freezing)
Ambient Humid. : Operating	45 - 85%RH (non-condensing)
Weight	approx. 50g
Accessories	Instruction Manual x 1

## Specifications

Power Supply	12-24VDC
Power Consumption	230mW Max.
Output Mode	Out, Blink
Output Voltage	NPN Open-collector (25VDC, 100mA)
Blinking Rate (tower light)	0.5Hz - 4Hz
Minimum Detection	100ms
Connection	4-core wire(1500mm, AWG24)
Sensor Sensitivity(Angle)	14° Max.
Sensor Sensitivity(Wavelength)	350nm - 970nm
Ambient Temp. : Operating	35 - 85%RH (Non-condensing)
Ambient Humid. : Operating	0 - 50°C (Non-freezing)
Ambient Temp. : Storage	-10 - +50°C (Non-freezing)
Weight	Approx. 50g
Accessories	Instruction Manual x 1, Cable-tie x 1

This catalog was last revised Oct. 8, 2021.

\*Subject to change without prior notice.

All Rights Reserved, Copyright © 2021, LINE SEIKI CO., LTD.



## LINE SEIKI CO., LTD.

37-7 Chuo-cho, 2-Chome  
Meguro-ku, Tokyo 152-0001 Japan  
Please visit our company website for contact details  
E-mail webtrade@line.co.jp URL <http://www.lineseiki.com>